







Pull down unit installation Instruction

Product	QTY	Accessories	QTY	Accessories	QTY
 Double layers pull down unit	1pcs	 St4*16 Cross recess self-tapping screw	10pcs	 Cover(LR)	every 1pcs
 Single layer pull down unit	1pcs	 St4*16 Cross recess self-tapping screw	10pcs	 Cover(LR)	every 1pcs

Product specifications and applicable cabinets

Applicable cabinet	Product specifications(Length*Width*Height(mm))
600	564x288x431/564x288x463
700	664x288x431/664x288x463
800	764x288x431/764x288x463
900	864x288x431/864x288x463

Lift up door

W:Min.net depth:300mm

H:Mni.net height :684mm(Double layers)/564mm(Single layer)


L:600 cabinet for 18mm panel(564mm)

700 cabinet for 18mm panel(664mm)

800 cabinet for 18mm panel(764mm)

900 cabinet for 18mm panel(864mm)

The distance between the bottom of cabinet
and obstacles below should be more than 350mm



Normal hinged door

W:Min.net depth:300mm

H:Mni.net height :684mm(Double layers)/564mm(Single layer)


L:600 cabinet for 18mm panel(564mm)

700 cabinet for 18mm panel(664mm)


800 cabinet for 18mm panel(764mm)

900 cabinet for 18mm panel(864mm)


The distance between the bottom of cabinet
and obstacles below should be more than 350mm



Basket Installation



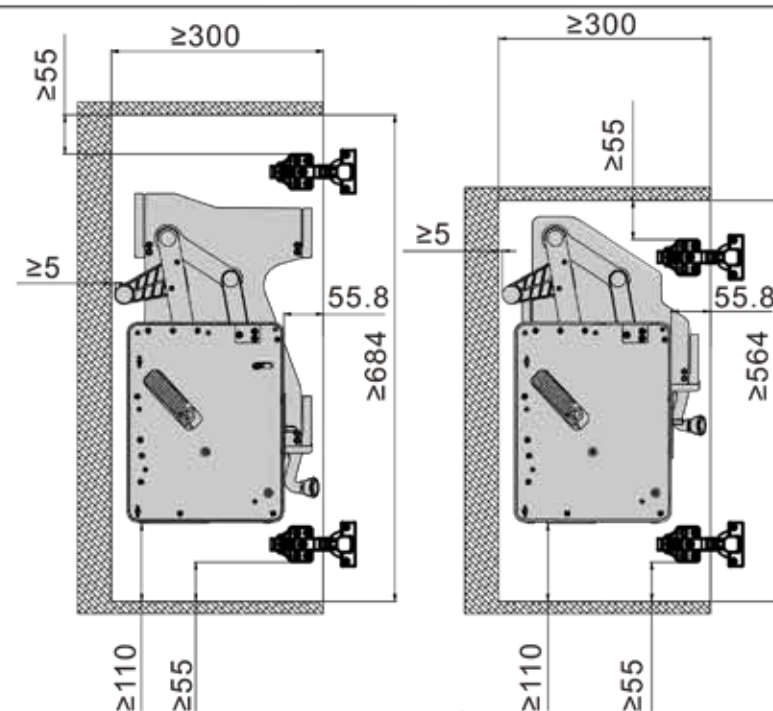


Dimension marking on the side panels of the cabinet
according to the dimensional requirements shown in the drawings

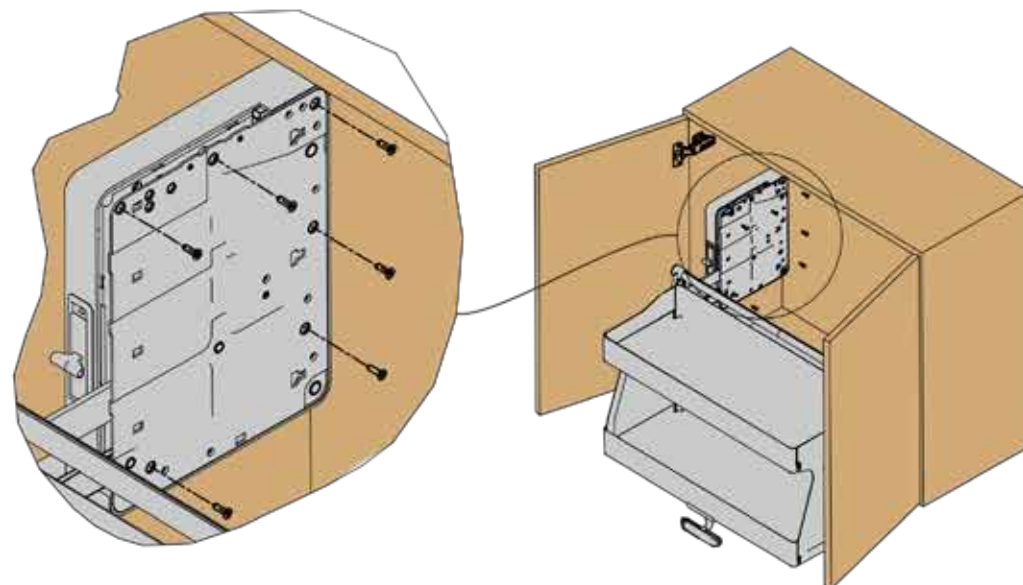

Use ST4*16 self-tapping screws to attach the Basket to the side panels

Install cover as shown

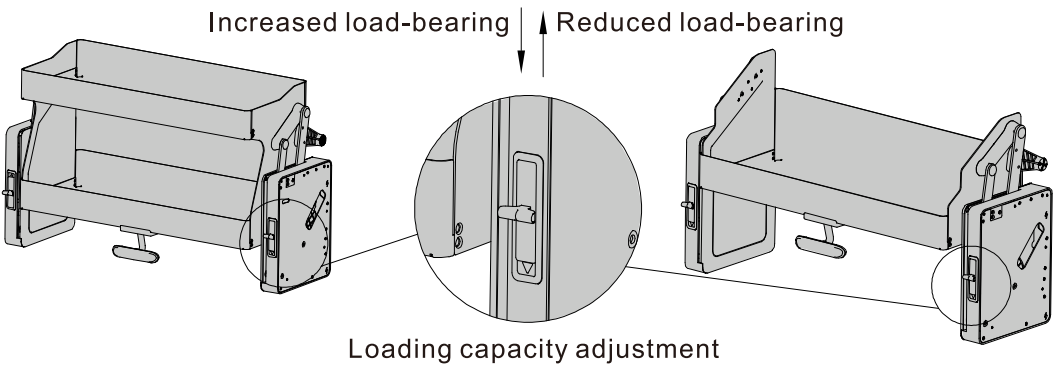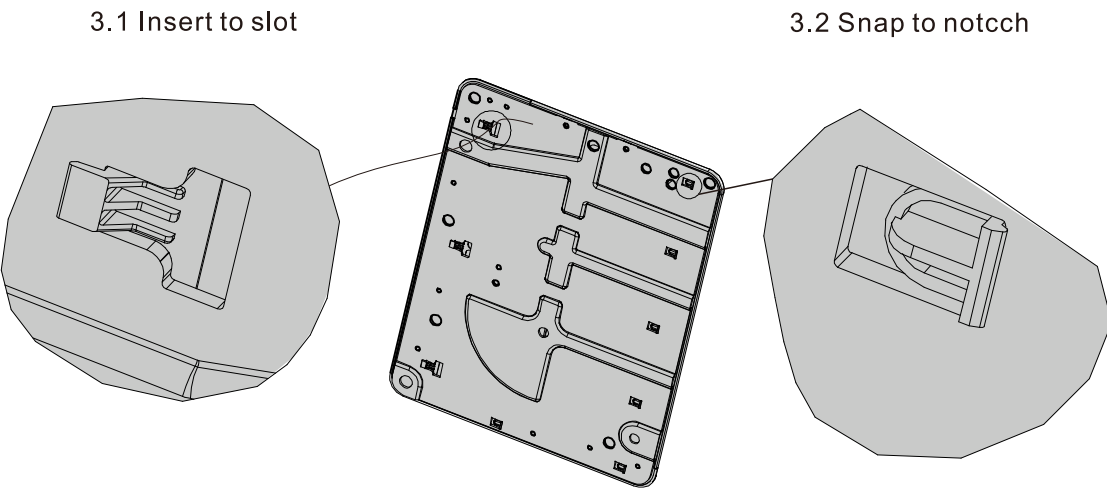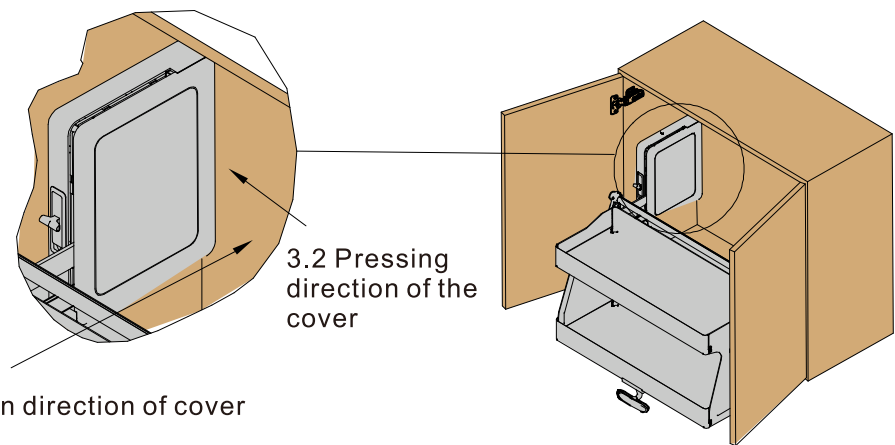

When basket is empty or light weighted, please choose empty posutuon. Otherwise basket and stuffs might be damaged due to too large rebound force. Please choose proper bitton position according to the weight of stuffs to make sure efficient soft closing function. The loading capacity can't exceed the prescribed weight

600-900mm cabinet weight reference (KG)		Suitable for both single-layer and double-layer applications.
L	R	
MAX3.5KG		
MAX7.5KG		
MAX10KG		
MAX15KG		